



NFPA INTERCHANGEABLE
FI / OI / OILF / OIM
FIDE / OIDE

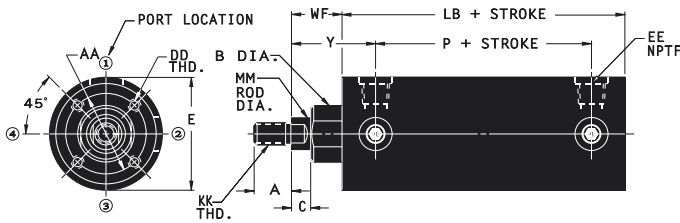

Models FI/OI/OILF/OIM

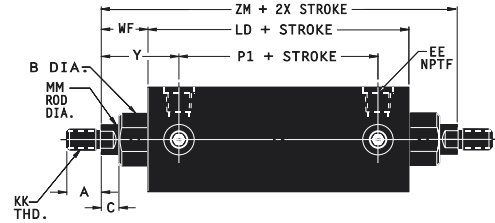

Models FIDE/OIDE

DIMENSION REFERENCE	CYLINDER BORE					DIMENSION REFERENCE	CYLINDER BORE				
	1 1/2	2	2 1/2	3 1/4*	4*		1 1/2	2	2 1/2	3 1/4*	4*
A	3/4	3/4	3/4	1 1/8	1 1/8	LB	3 5/8	3 5/8	3 3/4	4 1/4	4 1/4
AA	1.21	1.60	2.00	2.62	2.62	LD	4 1/8	4 1/8	4 1/4	4 3/4	4 3/4
B	1 1/8	1 1/8	1 1/8	1 1/2	1 1/2	MM	5/8	5/8	5/8	1	1
C	3/8	3/8	3/8	1/2	1/2	P	2.29	2.29	2.42	2.44	2.44
DD	6-32	1/4-20	5/16-18	3/8-16	3/8-16	P1	2.79	2.79	2.92	2.94	2.94
E	1 3/4	2 1/4	2 3/4	3 1/2	4 1/4	WF	1	1	1	1 3/8	1 3/8
EE-NPTF	1/4-18	1/4-18	1/4-18	1/2-14	1/2-14	Y	1.67	1.67	1.67	2.28	2.28
KK	7/16-20	7/16-20	7/16-20	3/4-16	3/4-16	ZM	6 1/8	6 1/8	6 1/4	7 1/2	7 1/2

*Series FIDE not available in 3 1/4 or 4 bore.

**B Diameter has 4 flats of .965/.970 across for screw head clearance on 1 1/2 bore only.

See Application Information for sensors and magnetic switch options, mounting accessories, special options, and ordering information.