



### NuCushions Installed in Flairline NFPA Pneumatic Cylinders

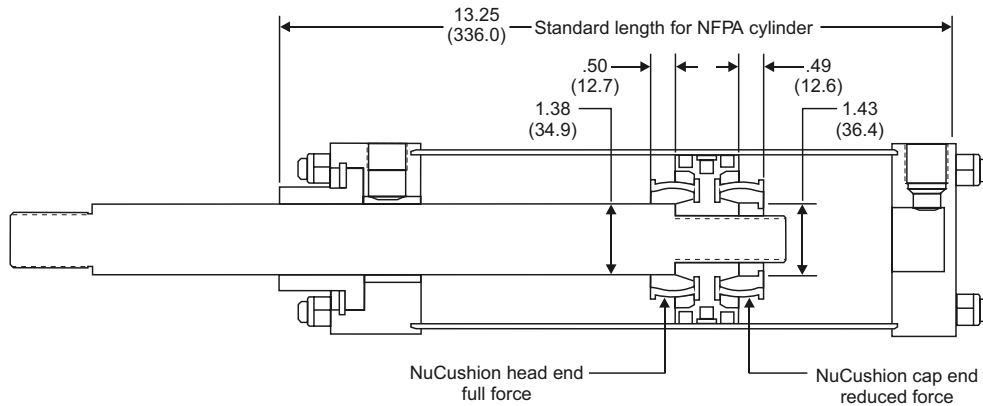

Flairline NFPA cylinder with NuCushions, 3.25 in (80.0 mm) bore x 8.00 in (200.0 mm) stroke

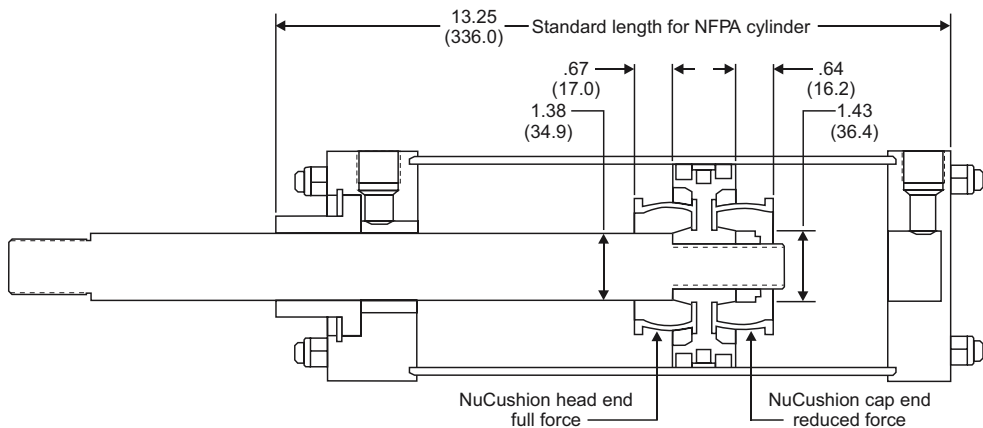

Flairline NFPA cylinder with NuCushions, 4.00 in (100.0 mm) bore x 8.00 in (200.0 mm) stroke

### NuCushion Specifications for Flairline NFPA Cylinders

Bore in (mm)	Rod Size in (mm)		Velocity fps (mps)		Force lbs (N)	
	Small	Large	Min.	Max.	Min.	Max.
3.25 (80.0)	1.00 (25.4)	1.37 (34.8)	0.50 (0.1)	2.50 (0.8)	250 (1,112.0)	560 (2,491.0)
4.00 (100.0)	1.00 (25.4)	1.37 (34.8)	0.50 (0.1)	2.50 (0.8)	375 (1,688.1)	850 (3,780.1)